

Pioneer Dj

# DJM-V10

6-channel professional DJ mixer

CRAFT YOUR SOUND

Elite audio quality

Six channels

4-band EQ

Dedicated filter

Expanded send/return section

3-band master isolator

Compressor knob on each channel

Dual headphones output and booth EQ

Support for external devices and apps





## DJM-V10 6-CHANNEL PROFESSIONAL DJ MIXER

Built to enable the most creative DJs to craft original soundscapes


### SPECIFICATION

<b>Software</b>	rekordbox Serato DJ Pro (support coming after DJM-V10 launch) TRAKTOR PRO 3.3.0 ShowKontrol								
<b>Frequency Response</b>	20 Hz to 40 kHz (LINE)								
<b>S/N Ratio</b>	116 dB (USB, DIGITAL IN) / 105 dB (LINE) / 88 dB (PHONO) / 79 dB (MIC1,2)								
<b>Total Harmonic Distortion</b>	0.005% (LINE-MASTER1)								
<b>Input/Output Terminals</b>	<table border="1"> <tr> <td><b>Inputs</b></td> <td>DIGITAL x 6 (Coaxial) LINE x 6 (RCA) PHONO x 4 (RCA) RETURN x 3 (1/4-inch TS jack) MIC x 2 (XLR &amp; 1/4-inch TRS Jack, 1/4-inch TRS jack)</td> </tr> <tr> <td><b>Outputs</b></td> <td>MASTER x 2 (XLR, RCA) DIGITAL MASTER x 1 (XLR) BOOTH x 1 (1/4-inch TRS jack) SEND x 3 (1/4-inch TS jack) HEADPHONE MONITOR x 4 (1/4-inch stereo jack x 2, 3.5-mm stereo mini jack x 2) REC x 1 (RCA)</td> </tr> <tr> <td><b>USB</b></td> <td>USB (Type A) x 1 USB (Type B) x 2</td> </tr> <tr> <td><b>Others</b></td> <td>LINK (LAN) x 1 MIDI (5-pin DIN) x 1</td> </tr> </table>	<b>Inputs</b>	DIGITAL x 6 (Coaxial) LINE x 6 (RCA) PHONO x 4 (RCA) RETURN x 3 (1/4-inch TS jack) MIC x 2 (XLR & 1/4-inch TRS Jack, 1/4-inch TRS jack)	<b>Outputs</b>	MASTER x 2 (XLR, RCA) DIGITAL MASTER x 1 (XLR) BOOTH x 1 (1/4-inch TRS jack) SEND x 3 (1/4-inch TS jack) HEADPHONE MONITOR x 4 (1/4-inch stereo jack x 2, 3.5-mm stereo mini jack x 2) REC x 1 (RCA)	<b>USB</b>	USB (Type A) x 1 USB (Type B) x 2	<b>Others</b>	LINK (LAN) x 1 MIDI (5-pin DIN) x 1
<b>Inputs</b>	DIGITAL x 6 (Coaxial) LINE x 6 (RCA) PHONO x 4 (RCA) RETURN x 3 (1/4-inch TS jack) MIC x 2 (XLR & 1/4-inch TRS Jack, 1/4-inch TRS jack)								
<b>Outputs</b>	MASTER x 2 (XLR, RCA) DIGITAL MASTER x 1 (XLR) BOOTH x 1 (1/4-inch TRS jack) SEND x 3 (1/4-inch TS jack) HEADPHONE MONITOR x 4 (1/4-inch stereo jack x 2, 3.5-mm stereo mini jack x 2) REC x 1 (RCA)								
<b>USB</b>	USB (Type A) x 1 USB (Type B) x 2								
<b>Others</b>	LINK (LAN) x 1 MIDI (5-pin DIN) x 1								
<b>Max. Dimensions (W x D x H)</b>	437.6 x 467.0 x 107.9 mm / 17.23 x 18.39 x 4.25 in								
<b>Weight</b>	11.9 kg / 26.24 lb								
<b>Accessories</b>	Power cord (lockable)* Quick Start Guide  *In selected regions, a non-lockable power cable is supplied instead.								

### PRODUCT FEATURES

#### ELITE AUDIO QUALITY

Feel the warmth of the natural sound and hear every detail in the music thanks to studio-quality 96-kHz/64-bit mixing and dithering processing within the DSP, 32-bit high-quality A/D and D/A converters, and a low-jitter clock circuit.




#### DEDICATED FILTER

Drastically change the sound of a track or make tiny adjustments using the newly developed filter with resonance control and a dedicated knob on each channel.

#### SIX CHANNELS

Choose your ideal setup and plug in everything from CDJs and turntables to samplers and synths. To make setup easy, the analog input terminals line up with each channel on the top panel.

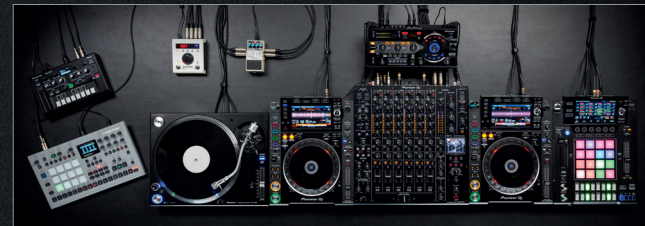


#### EXPANDED SEND/RETURN SECTION

Send audio to one of four built-in FX and up to two pieces of external equipment to create unique sounds and even live remixes.

#### 4-BAND EQ / COMPRESSOR

Sculpt your sound just the way you like. Completely isolate the high and/or low and tweak the two mid ranges - which have their own custom curves. Also, if you want to play old or unmastered tracks, turn the compressor knob on the relevant channel and the mixer will "beef up" the audio in real time.

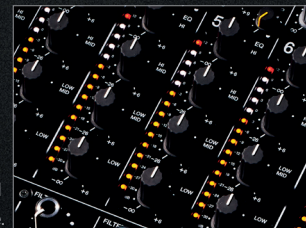

#### 3-BAND MASTER ISOLATOR

Effortlessly control the tone of your entire mix using the 3-band master isolator, which features new boost/cut curves and adjustments to the crossover frequencies and other parameters. Grab the large dials and hype up the crowd by drastically changing the sound.



Visit the Serato DJ Pro official website for its specifications: <https://serato.com/>

Visit the Native Instruments TRAKTOR PRO 3 official website for its specifications: <https://www.native-instruments.com>

\* Disclaimer: Specifications and price are subject to change.

\* rekordbox™ is a registered trademark of Pioneer DJ Corporation.

\* PRO DJ LINK™ is a trademark of Pioneer DJ Corporation.

\* Serato DJ Pro and Serato DJ are registered trademarks of Serato Limited.

\* TRAKTOR is a registered trademark of Native Instruments.

\* ShowKontrol is a trademark of TC Supply.

\* TC SUPPLY is a trademark of Event Imagineering Group.

\* Mac and macOS are trademarks of Apple Inc., registered in the U.S. and other countries.

\* Windows is a registered trademark of Microsoft Corporation in the U.S. and other countries.

\* Intel and Intel Core are registered trademarks of Intel Corporation or its subsidiaries in the U.S. and other countries.

\* The names of companies, product names, and technology names mentioned herein are the trademarks of their respective owners.

We've made every effort to show the product accurately, but colours and typography might be different in reality. Features and specifications are correct at the time of printing but are subject to change. Please speak to your Pioneer DJ dealer to make sure the product meets your needs.

**AlphaTheta EMEA Limited** | Artemis Building, Odyssey Business Park, West End Road, South Ruislip, HA4 6QE, UK | +44 (0) 203 761 7220  
**AlphaTheta Music Americas, Inc.** | 2050 W. 190th Street, Suite 109, CA 90504, Torrance, USA | +1 (424) 488-0480  
**AlphaTheta Corporation Ltd.** | 6-F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan | +81 045-522-5400