

Der D Sub 15 ist ein cardioid abstrahlender Subwoofer mit herausragender breitbandiger Direktivität. Der frontseitig verbaute Hochleistungs 15" Treiber arbeitet in einem Bassreflexgehäuse mit optimierten Strömungsquerschnitten, während das rückseitige 12" Chassis für die Richtwirkung zuständig ist. Der D Sub 15 wird 2-Wege aktiv über das Systemamping angefahren. Die gewünschte Abstrahlcharakteristik wird über die entsprechenden Presets eingestellt.

PRODUCT SPECIFICATIONS

Speaker Components	Front: 15" Nd (4" VC) Rear: 12" Nd (3" VC)
Description	Directional Subwoofer
Power AES / Peak	Front: 1000 W / 3000 W Rear: 500 W / 1500 W
Impedance nominal	Front: 8 Ω / Rear: 8 Ω
SPL 1 W / Peak @ 1 m	100 dB / 137 dB
Usable Range	40 Hz - 200 Hz (-6 dB)
Tuning Frequency excursion minimum	45 Hz
Connectors	2 x Speakon NL4MP in/out Coding (normal): 1+/- Rear, 2+/- Front Coding (switched): 1+/- loop thru, 2+/- Sub
Handles	6 x
Rigging / Fittings	2 x M20 for speaker poles
Weight	46 kg
Size height x width x depth	49.0 x 58.0 x 78.0 cm
Order No.	**00650**








Copyright 10-2026


SEEBURG
acoustic line

DIMENSIONS

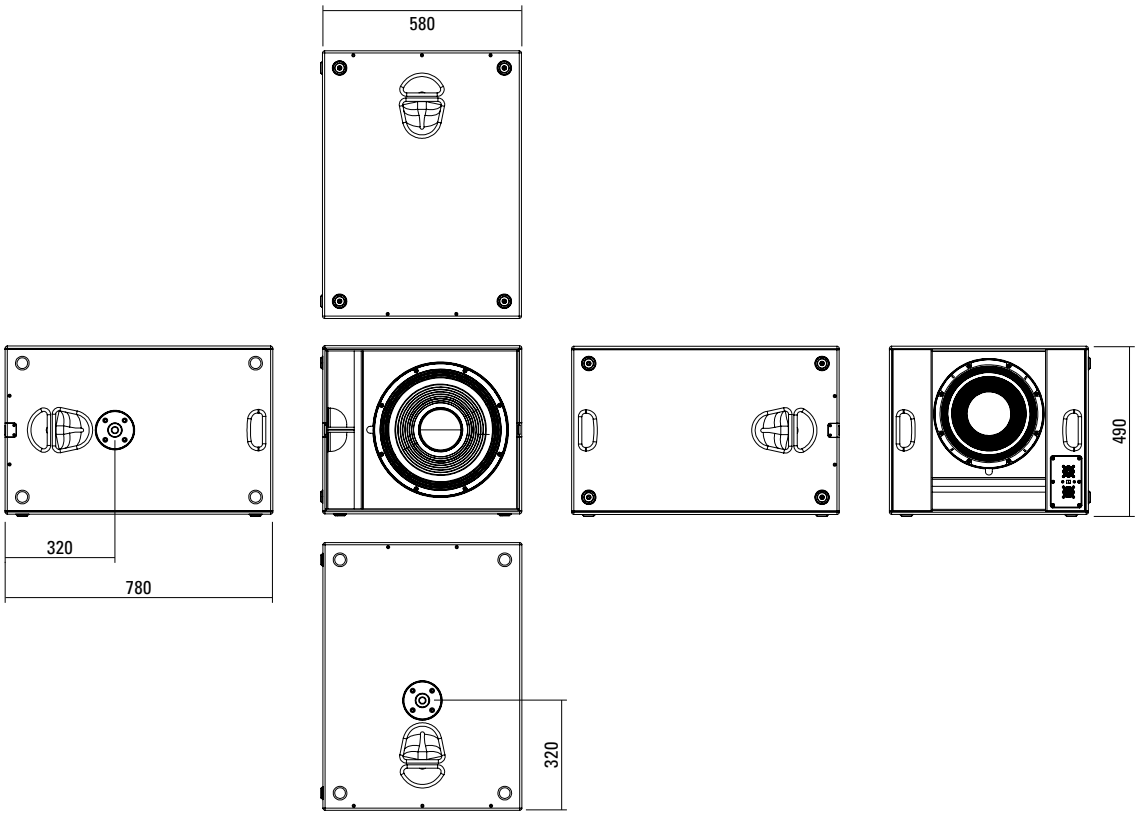


MEASUREMENTS


Cardioid Mode

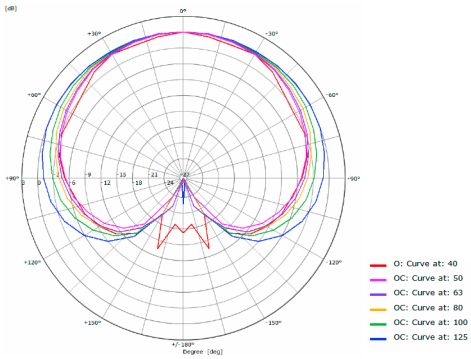


Hypercardioid Mode

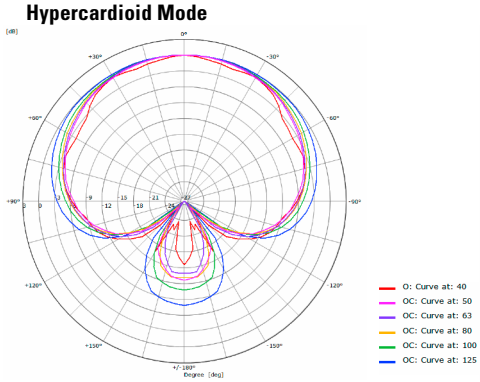

Endfired Mode

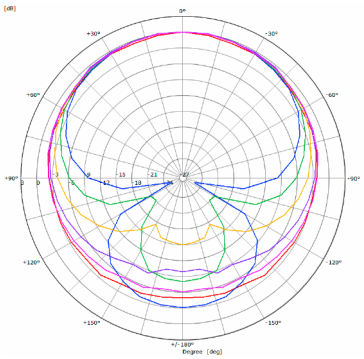

Frequency Response with Presets

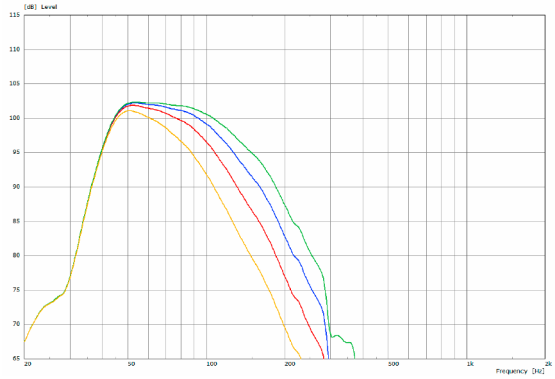

SEEBURG acoustic line
Produktions- und Vertriebs GmbH
Fon: +49 (0)7307 97 00-0
Fax: +49 (0)7307 97 00-29
Auweg 32
D-89250 Senden-Freudenegg
info@seeburg.net
www.seeburg.com

SEEBURG acoustic line