

**Der D Sub 18 ist ein cardioid abstrahlender Subwoofer mit herausragender breitbandiger Direktivität. Der frontseitig verbaute Hochleistungs 18" Treiber arbeitet in einem Bassreflexgehäuse mit optimierten Strömungsquerschnitten, während das rückseitige 15" Chassis für die Richtwirkung zuständig ist.** Der D Sub 18 wird 2-Wege aktiv über das Systemamping angefahren. Die gewünschte Abstrahlcharakteristik wird über die entsprechenden Presets eingestellt.

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| **Speaker Components** | Front: 18" Nd (4.5" VC)<br>Rear: 15" Nd (4" VC) |
| **Description** | Directional Subwoofer |
| **Power** AES / Peak | Front: 1500 W / 4500 W<br>Rear: 1000 W / 3000 W |
| **Impedance** nominal | Front: 8 Ω / Rear: 8 Ω |
| **SPL** 1 W / Peak @ 1 m | 102 dB / 141 dB |
| **Usable Range** | 35 Hz - 200 Hz (-6 dB) |
| **Tuning Frequency** excursion minimum | 40 Hz |
| **Connectors** | 2 x Speakon NL4MP in/out<br>Coding (normal): 1+/- Rear, 2+/- Front<br>Coding (switched): 1+/- loop thru, 2+/- Sub |
| **Handles** | 8 x |
| **Rigging / Fittings** | 2 x M20 for speaker poles |
| **Weight** | 69 kg |
| **Size** height x width x depth | 58.0 x 78.0 x 78.0 cm |
| **Order No.** | **00670** |









Copyright 10-2026


SEEBURG
acoustic line

## DIMENSIONS

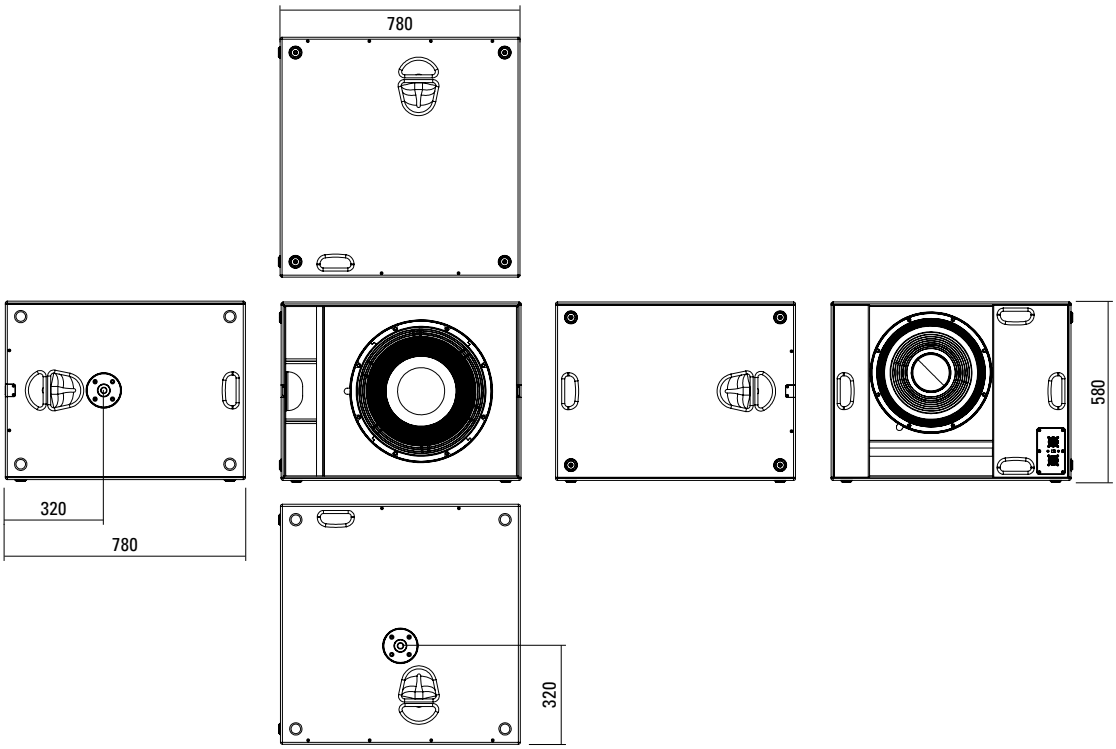



## MEASUREMENTS


### Cardioid Mode

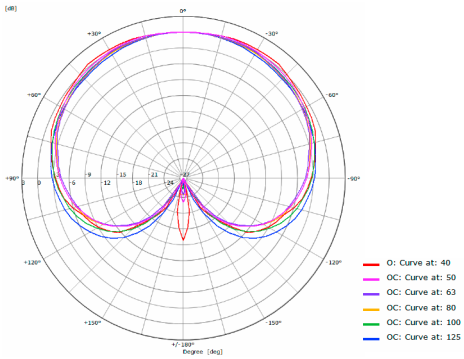



### Hypercardioid Mode

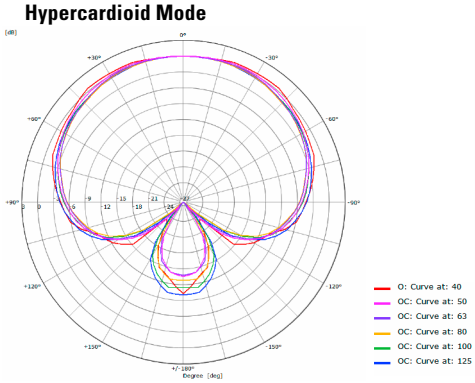


### Endfired Mode

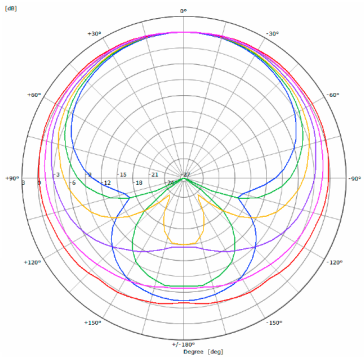

### Frequency Response with Presets

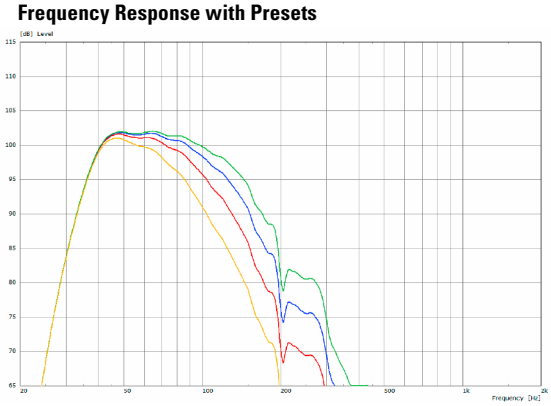



**SEEBURG acoustic line**
Produktions- und Vertriebs GmbH
Fon: +49 (0)7307 97 00-0
Fax: +49 (0)7307 97 00-29
Auweg 32
D-89250 Senden-Freudenegg
info@seeburg.net
www.seeburg.com

SEEBURG acoustic line