

Die Lautsprecher der F-Serie eignen sich für alle Anwendungen, bei denen eine hochpräzise und breitbandige Schallübertragung auch bei tieferen Frequenzen gefordert wird. Die optische Erscheinung ist schlank und elegant. Daher gelingt die Integration perfekt und eröffnet viele Anwendungsmöglichkeiten im Bereich Corporate Events, Messen und Produktpräsentationen, Pressekonferenzen, in Tagungsräumen und Hörsälen, in Theater-, Konzert- und Kinosälen sowie in Sporthallen und Fitnesscentern. Werden die Lautsprecher durch Subwoofer unterstützt sind auch Konzertpegel möglich. Die zeilenförmige Anordnung der Komponenten sorgt für eine gute Bündelung zur Optimierung der Sprachverständlichkeit. Alle Modelle verfügen über neu entwickelte Komponenten der Oberklasse, um ein möglichst gutes Klangergebnis und definiertes Abstrahlverhalten zu erreichen.

PRODUCT SPECIFICATIONS


Speaker Components	2 x 6,5" Nd (2,5" VC) / 1" Nd (1,7" VC)
Description	Fullrange Speaker System
Power AES / Peak	600 W / 1800 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	92,5 dB / 125 dB
Usable Range	65 Hz - 20 kHz (-6 dB)
Tuning Frequency Excursion minimum	65 Hz
X - Overpoint acoustical	1,1 kHz
Coverage horizontal / vertical	90° x 60°, rotatable
Enclosure Wedge Angle	20°
Connectors	2 x NLT4MP in/out (optionally NLT4FP) Coding: 1 +/- FR, 2 +/- loop thru
Handles	1 x
Rigging / Fittings	8 x M10 / 2 x M6 35 mm pole mount
Weight	12,5 kg
Size height x width x depth	52,0 x 21,0 x 30,0 cm
Order No.	**00315**



Das Hochtonhorn lässt sich je nach Anforderung um 90° drehen.




Das Frontgitter wird über Magnete fixiert und ist leicht abnehmbar.



Copyright 03-2026

SEEBURG
acoustic line


DIMENSIONS

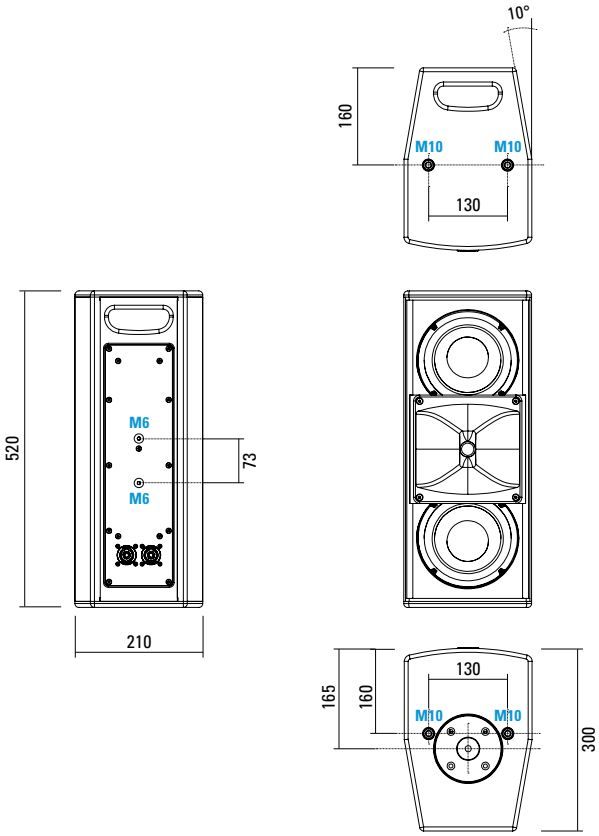

8 x M10 Twinpoints for MultiRigg™


MEASUREMENTS

2D Directivity Plot - horizontal

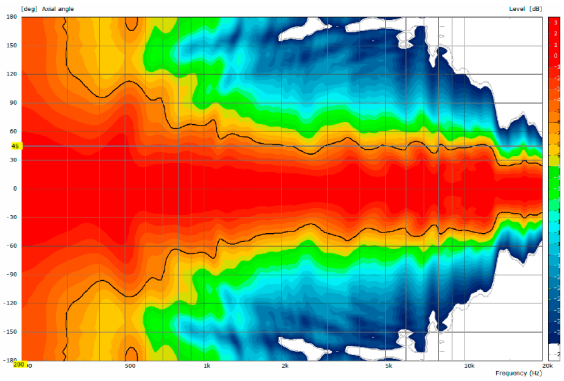




2D Directivity Plot - vertical

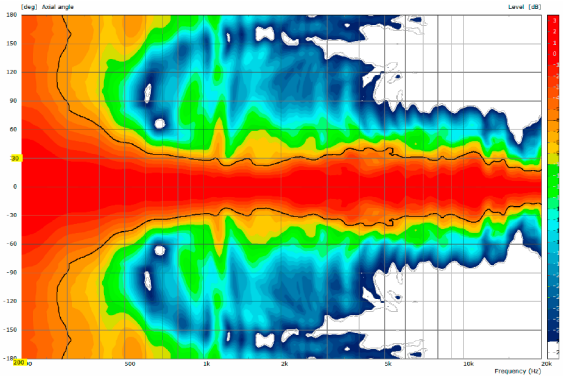


Frequency Response with Preset + Impedance

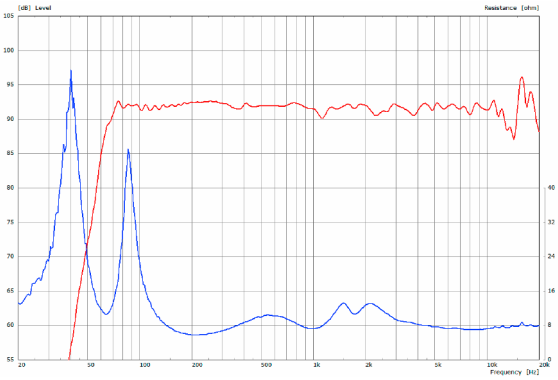

SEEBURG
acoustic line

Flying-Bracket



for F 2, horizontal alignment,
(incl. 4 x socket head screws
M10 x 20 mm)

Order No. **01207/F2**

Handle Screw



for flying brackets, adjustable,
M10 x 20 mm

Order No. **08375/20**

MultiRigg™



for flown and ground stacked
applications, (incl. 2 x knurled screws
M10 x 20 mm, 1 x handle screw
M8 x 55 mm), max. load 50 kg

Order No. **01360**

MultiRigg™ Light



for fixed installations,
(incl. 2 x socket head screws M10 x
20 mm), max. load 50 kg

Order No. **01362**

MultiRigg™ Basic



(incl. load adapter M10,
2 x knurled screws M10 x 20 mm),
max. load: 50 kg

Order No. **01364**

MultiTilt™



Tilt adapter with adjustable tilt
from 0° to 37,5° (2,5° steps),
integr. pole mount adapter with clam-
ping device, (incl. 2 x knurled screws
M10 x 20 mm), max. load 50 kg

Order No. **01370**

Knurled Screw



M10 x 20 mm

Order No. **73750/w** (RAL 9010)
Order No. **73750**

Pole Mount Adapter



35 mm ø –> M10 x 16 mm,
M8 x 20 star knob screw

Order No. **08126**

35 mm ø –> M10 x 16 mm

Order No. **08126/II**

Knurled Head Nut



reduction screw for fastening
M10 Pole Mount Adapter (08126)

Order No. **73755**

Flange



with ball and socket joint,
with additional locking screw,
M10 x 15 mm, max. load 15 kg

Order No. **08125**

Quick Trigger Clamp - small



M10, max. load 20 kg

Order No. **01223/20 kg**

Quick Trigger Clamp



max. load 100 kg

Order No. **01223/100 kg**

Truss Clamp



incl. M10 mini TV spigot,
max. load 15 kg

Order No. **01221**

Steel Safety



6 mm x 600 mm, black,
quick connector undetachably,
max. load 22 kg (BGI 810-3)

Order No. **01376/6**

Ring Screw



M10– DIN 580

Order No. **73700** (zinced)
Order No. **73700/sw** (black zinced)

TV Spigot



M10 internal thread,
28 mm Ø

Order No. **08128**

SEEBURG
acoustic line

ACCESSORIES F 2

Wall Mount



ball and socket joint flange (08125) + 08125/plate

Order No. **08125/set**


Wall Mount



bar: 269 mm,
(incl. socket head screw M10 x 70 mm, hex lock nut and flat washer M10),
max. load 40 kg,

Order No. **08130/F/269/w** (RAL 9010)
Order No. **08130/F/269**

Wall Mount



bar: 400 mm,
(incl. socket head screw M10 x 70 mm, hex lock nut and flat washer M10),
max. load 40 kg,

Order No. **08130/F400/w** (RAL 9010)
Order No. **08130/F400**

Wall Mount



for permanent installation,
incl. tilt angle stop, M10,
max. load 15 kg

Order No. **08131/F/w** (RAL 9010)
Order No. **08131/F**

Wall Mount



2 x M6 fixing holes (d=73 mm),
1 x M10 fixing hole (center),
max. load 25 kg

Order No. **03034/w** (RAL 9010)
Order No. **03034**

Wall Mount



using fixing points d= 73 mm

Order No. **08132/w** (RAL 9010)
Order No. **08132**

Bag



for 1 x F 2, with two-way zip, padded, incl. label pocket

Order No. **01224/F2**


Flight Case Trunk



for 2 pcs. F 2,
accessory compartment, 20,5 cm wide, with mounting option for MultiRigg / MultiTilt, heavy duty, 9 mm birch multiplex, PVC coated black, 6 x recessed sprung handles, 1 x butterfly latch medium, 4 x stacking recesses,
4 x 100 mm blue wheels (2 pcs. with brake), interior lined with felt, 27 kg
Size: 53 x 60 x 71,5 cm (W x D x H)

Order No. **16105**









SEEBURG acoustic line
Produktions- und Vertriebs GmbH
Fon: +49 (0)7307 97 00-0
Fax: +49 (0)7307 97 00-29
Auweg 32
D-89250 Senden-Freudenegg
info@seeburg.net
www.seeburg.com

SEEBURG acoustic line