



Passive Erweiterungsmodule für GL-Systeme zur Erhöhung der Reichweite bzw. Vergrößerung des vertikalen Splaywinkels. Damit können GL 16- oder GL 24-Systeme einer speziellen akustischen Anforderung entsprechend angepasst werden. GL 8 wird 2-Wege aktiv betrieben. Versionen mit Passivweiche sind ebenfalls erhältlich.

## PRODUCT SPECIFICATIONS

|                                           | GL 8 a                                                              | GL 8 xov                                                            |
|-------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| <b>Speaker Components</b>                 | 2 x 6,5" Nd / 8 x 1" Nd Tweeter                                     | 2 x 6,5" Nd / 8 x 1" Nd Tweeter                                     |
| <b>Description</b>                        | Cylindric Wave Radiator                                             | Cylindric Wave Radiator                                             |
| <b>Power</b> AES / Peak                   | LF: 200 W / 600 W<br>HF: 75 W / 225 W                               | 200W / 600 W                                                        |
| <b>Impedance</b> nominal                  | LF: 16 Ω / HF: 16 Ω                                                 | 16 Ω                                                                |
| <b>SPL</b> 1 W / Peak @ 1 m               | LF: > 93 dB / 121 dB<br>HF: > 94 dB / 118 dB                        | > 121 dB                                                            |
| <b>Usable Range</b>                       | 80 Hz - 20 kHz (-6 dB)                                              | 80 Hz - 20 kHz (-6 dB)                                              |
| <b>Tuning Frequency</b> excursion minimum | 90 Hz                                                               | 90 Hz                                                               |
| <b>X - Overpoint</b> acoustical           | Depends on preset                                                   | 1,1 kHz                                                             |
| <b>Coverage</b> horizontal / vertical     | 100° x 7° (i-version)<br>100° x 31° (c-version)                     | 100° x 7° (i-version)<br>100° x 31° (c-version)                     |
| <b>Mechanical Splay Angle</b>             | 0° (i-version)<br>24° (c-version)                                   | 0° (i-version)<br>24° (c-version)                                   |
| <b>Connectors</b>                         | 2 x Speakon NL4MP in/out<br>Coding: 1 +/- HF, 2 +/- LF              | 2 x Speakon NL4MP in/out<br>Coding: 1 +/- HiMid, 2 +/- loop thru    |
| <b>Handles</b>                            | 1 x                                                                 | 1 x                                                                 |
| <b>Rigging / Fittings</b>                 | 8 x M10 (i-version)<br>6 x M10 (c-version)                          | 8 x M10 (i-version)<br>6 x M10 (c-version)                          |
| <b>Weight</b>                             | 8,5 kg                                                              | 9,0 kg                                                              |
| <b>Size</b> height x width x depth        | 36,2 x 18,9 x 24,5 cm (i-v.)<br>38,0 x 18,9 x 25,8 (24,5) cm (c-v.) | 36,2 x 18,9 x 24,5 cm (i-v.)<br>38,0 x 18,9 x 25,8 (24,5) cm (c-v.) |
| <b>Order No.</b>                          | <b>00490/i/a</b> (i-version)<br><b>00490/c/a</b> (c-version)        | <b>00490/i/xov</b> (i-version)<br><b>00490/c/xov</b> (c-version)    |




Einfache Montage der Erweiterungs-module.




## DIMENSIONS

### GL 8 i

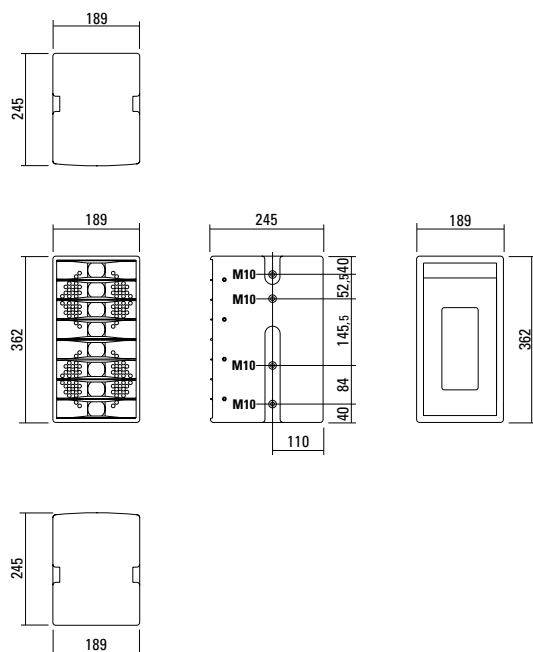

### GL 8 c

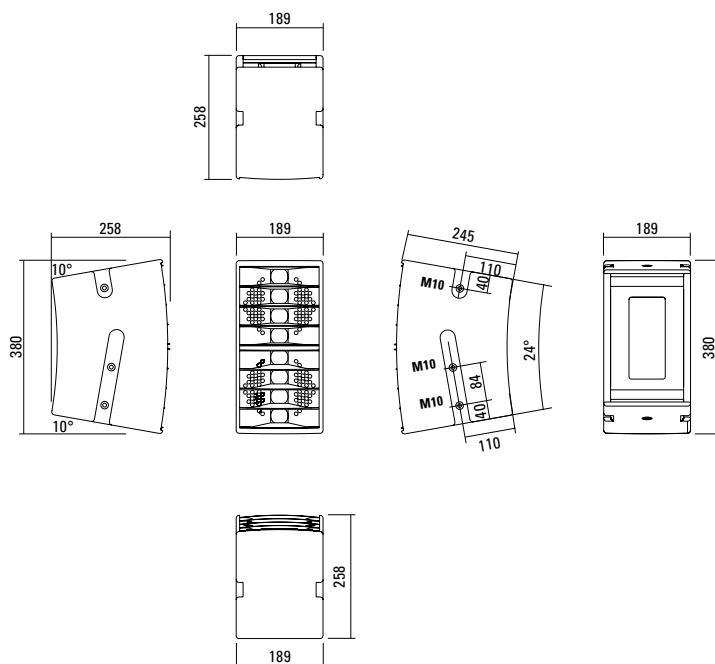

## APPLICATIONS



GL 8 i / GL 24



GL 16 c / GL 8 c



GL 8 i / GL 24 j



Einfache Montage der Erweiterungsmodule.



### Flying Cradle

for GL System,  
(incl. 1 x load adapter M10,  
1 x ball lock pin 8 x 25 mm),  
max. load: 120 kg  
Order No. **01354/II**



### Cradle

short, for GL System,  
fixing points for MultiRigg™  
Order No. **01351**



### Flying L-Bracket

for A 1 / GL 8 / X 1 / X 2 / TS Nano,  
horizontal and vertical alignment,  
(incl. white version: 1 x socket head  
screw M10 x 20 mm, black version:  
1 x adjustable handle screw  
M10 x 20 mm)

Order No. **01200/set/w** (RAL 9010)  
Order No. **01200/set**



### Load Adapter M10

M10  
Order No. **01328**



### Ball Lock Pin

ø 8 x 25 mm  
Order No. **01380/8x25**



### MultiRigg™

for flown and ground stacked  
applications, (incl. 2 x knurled screws  
M10 x 20 mm, 1 x handle screw  
M8 x 55 mm), max. load 50 kg  
Order No. **01360**



### MultiRigg™ Light

for fixed installations,  
(incl. 2 x socket head screws M10 x  
20 mm), max. load 50 kg  
Order No. **01362**



### MultiRigg™ Basic

(incl. load adapter M10,  
2 x knurled screws M10 x 20 mm),  
max. load: 50 kg  
Order No. **01364**



### Knurled Head Nut

reduction screw for fastening  
M10 Pole Mount Adapter (08126)  
Order No. **73755**



### Flange

with ball and socket joint,  
with additional locking screw,  
M10 x 15 mm, max. load 15 kg  
Order No. **08125**



## ACCESSORIES GL 8

### Connection Bar



GL 24 standard version → GL 8c  
for Downfill, a pair, incl. screws  
Order No. **08159**

### Knurled Screw



M10 x 20 mm  
Order No. **73750/w** (RAL 9010)  
Order No. **73750**

### TV Spigot



10 mm internal thread,  
28 mm Ø  
Order No. **08128**

### Steel Safety



6 mm x 600 mm, black,  
quick connector undetachably,  
max. load 22 kg (BGI 810-3)  
Order No. **01376/6**

### Ring Screw



M10– DIN 580  
Order No. **73700** (zincd)  
Order No. **73700/sw** (black zincd)

### Pole Mount



35 mm Ø → M10,  
adjustable  
Order No. **08126/adj**

### Pole Mount Adapter



35 mm Ø → M10 x 16 mm,  
star knob screw M8 x 20 mm  
Order No. **08126**  
Order No. **08126/w** (RAL 9010)

### Pole Mount Adapter



35 mm Ø → M10 x 16 mm  
Order No. **08126/II**  
Order No. **08126/II/w** (RAL 9010)

### Bag



for 2 x GL 8 / for 2 x X 2 / 2 x TSM 8,  
padded with pocket for accessories  
Order No. **01245**

### Height Extender



for stacking  
GL 8 i, GL 16 i, GL 16 Sub  
height 35,4 cm  
Order No. **01277/35**  
  
height 110 cm  
Order No. **01277/110**



Height Extender